

NO. A-07514-2


PUMP PERFORMANCE CURVES

| | | |
|---|--|--------------------|
| TYPE Submersible Channel Impeller Sewage Pump | MODEL 100B42.2 -52 TOS100B42.2 -52 | FREQUENCY 50 Hz |
|---|--|--------------------|

CUSTOMER'S NAME _____

EQUIPMENT TITLE _____ NO. _____

| | STANDARD SPECIFICATIONS | REQUIRED SPECIFICATIONS |
|--------------------|------------------------------------|-------------------------|
| DISCHARGE BORE | 100 mm | mm |
| TOTAL HEAD | 10 m | m |
| CAPACITY | 0.6 m ³ /min | m ³ /min |
| MOTOR OUTPUT | 2.2 kW | kW |
| PHASE x VOLTAGE | 3 ϕ x V | ϕ x V |
| CURRENT | A | A |
| POLES / REVOLUTION | 4 P / s. s. 1500 min ⁻¹ | P / min ⁻¹ |
| STARTING METHOD | DIRECT ON LINE | |
| INSULATION CLASS | E | |

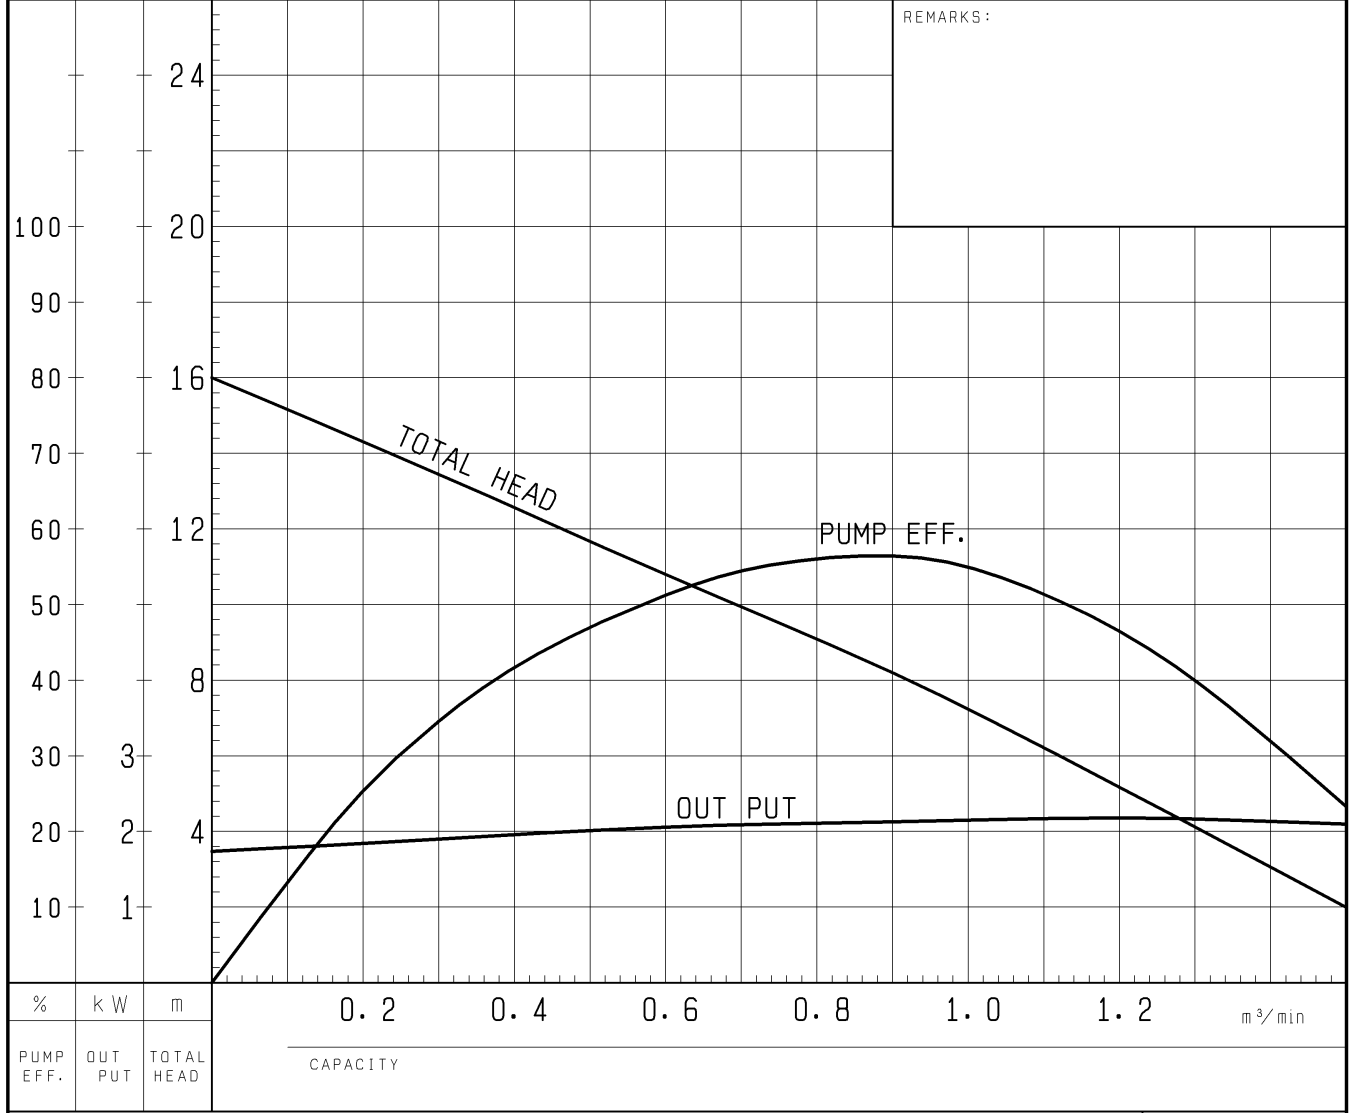

TSURUMI MFG. CO., LTD.