NO. A-18727-1

PUMP PERFORMANCE CURVES

TYPE	MODEL	FREQUENCY
Sewage Submersible Channel Impeller Pump	100B45.5 -54 TOS100B45.5 -54	50 Hz

CUSTOMER'S NAME

EQUIPMENT TITLE

NO.

	STANDARD SPECIFICATIONS	REQUIRED SPECIFICATIONS
DISCHARGE BORE	100 mm	mm
TOTAL HEAD	20 m	m
CAPACITY	0.6 m^3/min	m^3/min
MOTOR OUTPUT	5.5 kW	kW
PHASE × VOLTAGE	3 φ × V	φ × V
CURRENT	A	A
POLES / REVOLUTION	4 P / s.s. 1500 min^{-1}	P / min^{-1}
STARTING METHOD	DIRECT ON LINE	
INSULATION CLASS	F	

REMARKS:

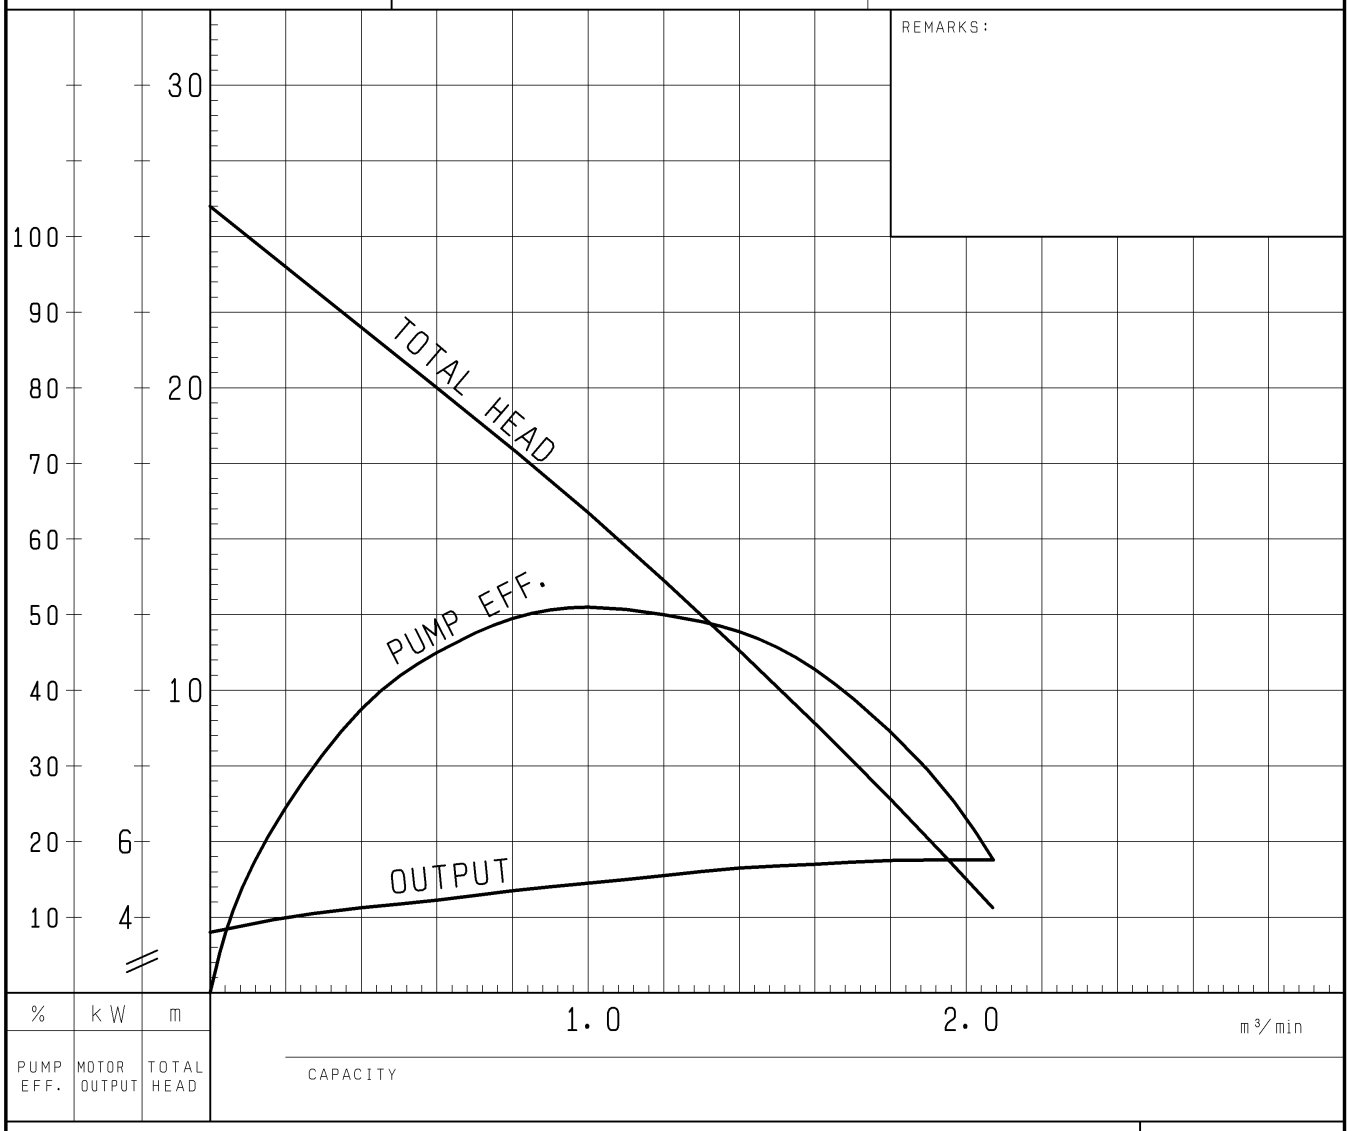

TSURUMI MFG. CO., LTD.