

NO.

A-07532-1

# PUMP PERFORMANCE CURVES

 TYPE Sewage Submersible  
 Channel Impeller Pump

 MODEL 150B63.7-51  
 TOS150B63.7-51


FREQUENCY 50 Hz

CUSTOMER'S NAME

EQUIPMENT TITLE

NO.

	STANDARD SPECIFICATIONS	REQUIRED SPECIFICATIONS
DISCHARGE BORE	150 mm	mm
TOTAL HEAD	5.0 m	m
CAPACITY	2.5 m <sup>3</sup> /min	m <sup>3</sup> /min
MOTOR OUTPUT	3.7 kW	kW
PHASE x VOLTAGE	3 $\phi$ x V	$\phi$ x V
CURRENT	A	A
POLES / REVOLUTION	6 P / S. S. 1000 min <sup>-1</sup>	P / min <sup>-1</sup>
STARTING METHOD	DIRECT ON LINE	
INSULATION CLASS	B	

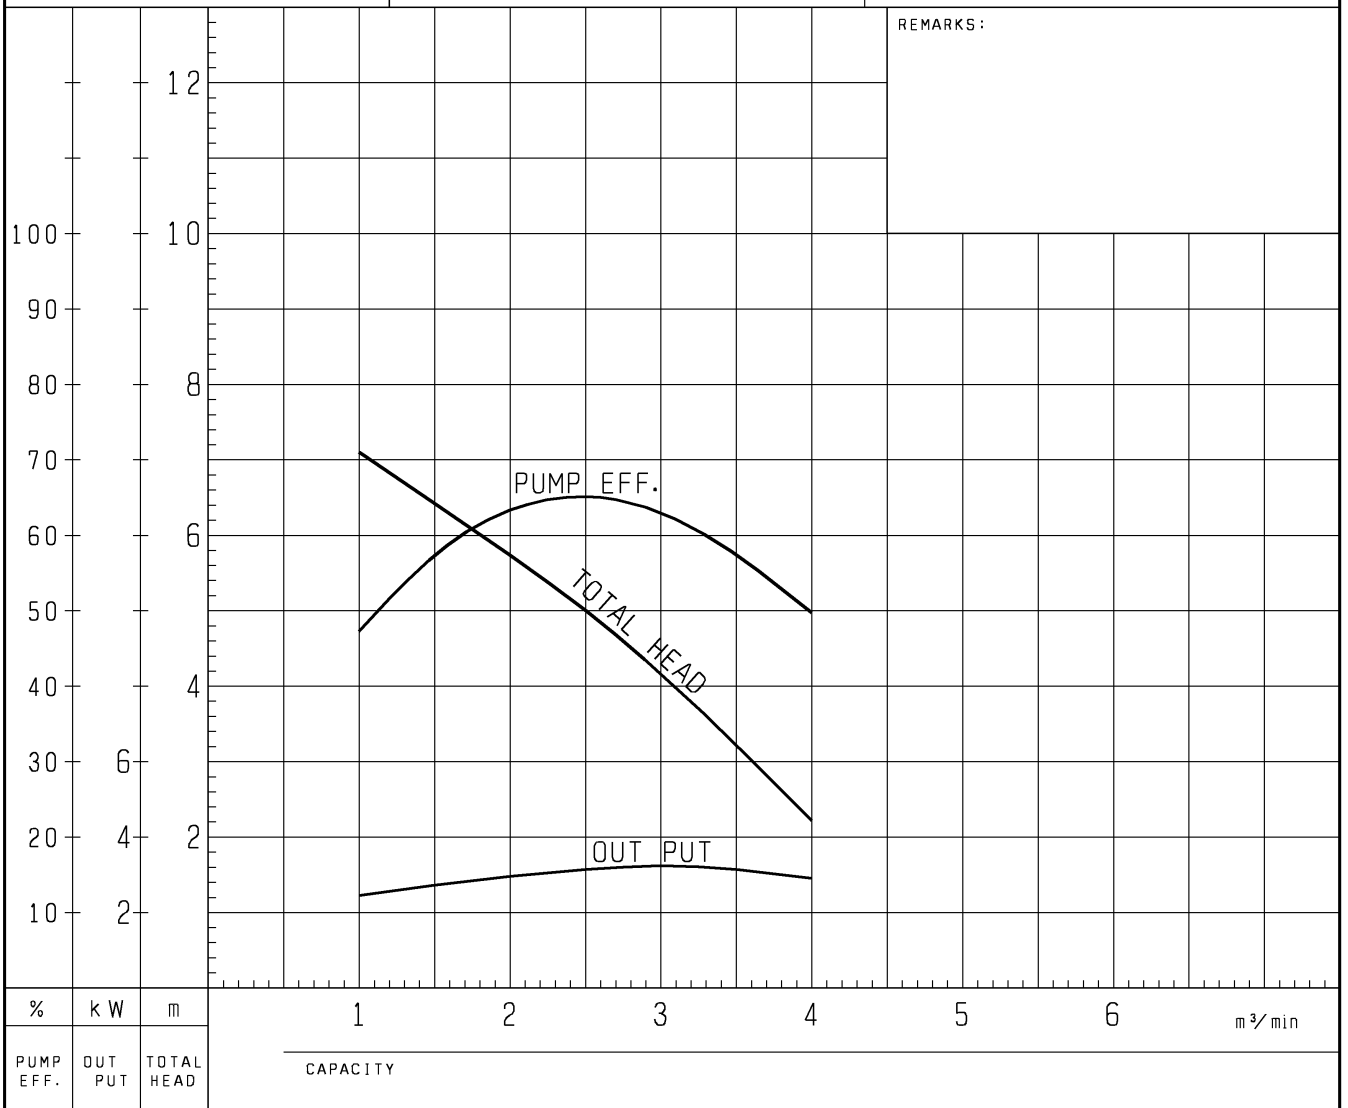

TSURUMI MFG. CO., LTD.