

NO.

A-21737-1

# PUMP PERFORMANCE CURVES

TYPE Submersible  
Vortex Sewage Pump

MODEL 50U2.75 -56  
50UA/W2.75 -55


FREQUENCY  
50 Hz

CUSTOMER'S NAME

EQUIPMENT TITLE

NO.

|                    | STANDARD SPECIFICATIONS            | REQUIRED SPECIFICATIONS |
|--------------------|------------------------------------|-------------------------|
| DISCHARGE BORE     | 50 mm                              | mm                      |
| TOTAL HEAD         | 8.5 m                              | m                       |
| CAPACITY           | 0.2 m <sup>3</sup> /min            | m <sup>3</sup> /min     |
| MOTOR OUTPUT       | 0.75 kW                            | kW                      |
| PHASE × VOLTAGE    | 3 φ × V                            | φ × V                   |
| CURRENT            | A                                  | A                       |
| POLES / REVOLUTION | 2 P / S. S. 3000 min <sup>-1</sup> | P / min <sup>-1</sup>   |
| STARTING METHOD    | DIRECT ON LINE                     |                         |
| INSULATION CLASS   | E                                  |                         |

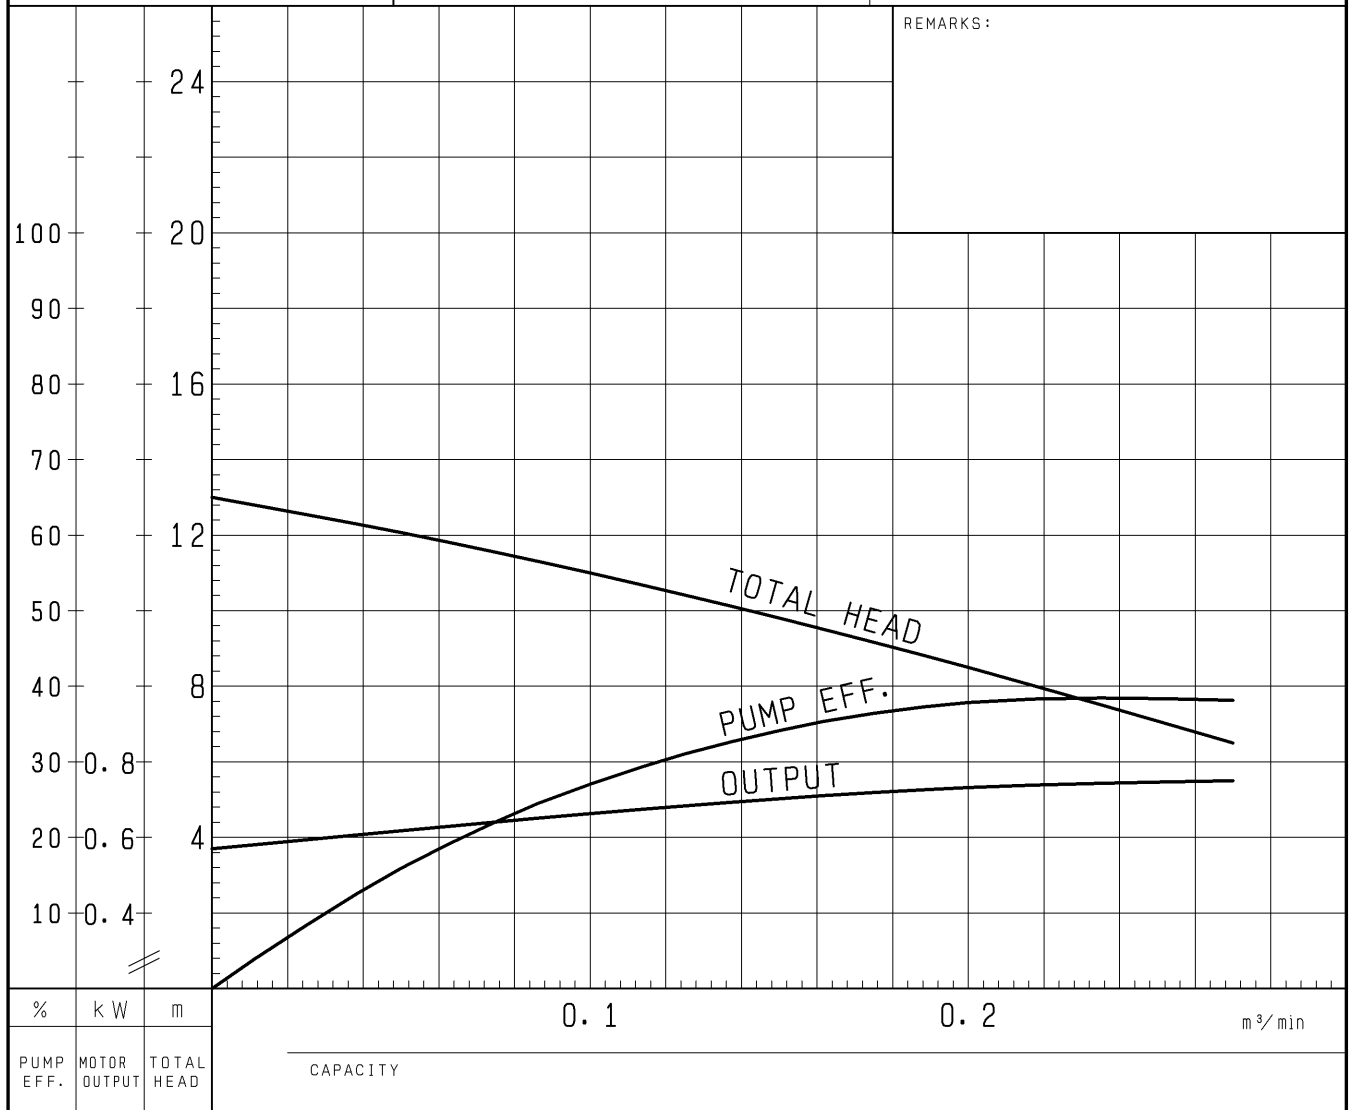

TSURUMI MFG. CO., LTD.