



Technical data

Date	6/22/2022
Offer N.	---
Pump Type	CM32-200A


Client	NTD Pumps Co.,LTD	Reference	---
--------	-------------------	-----------	-----

Pump data



Pump body	Cast iron GJL-250	Monobloc horizontal centrifugal pumps, constructed to EN 733 standards; widely used in water supplies, pressurisation and fire-fighting systems, cooling, heating, irrigation, industrial and agricultural applications. The pumps are equipped with cast iron impeller in standard configuration; on request, they are available with bronze or AISI 316 stainless steel impeller. Pumps are supplied with counter-flange.
Motor bracket	Cast iron GJL-250	
Impeller	Cast iron GJL-250 On request bronze or stainless steel AISI 316	
Mechanical seal	Ceramic-Graphite	
Motor shaft	Stainless steel AISI 304 EN X5CrNi18-10	
Liquid temperature	-10°C +90°C	
Operating pressure	Max 10 bar	

P2		P1 (kW)		A		Q (m ³ /h - l/min)											
(HP)	(kW)	1~	3~	1x230V	3x400V	0	6	7.5	9	12	15	18	21	24	27	30	33
						0	100	125	150	200	250	300	350	400	450	500	550
						H (m)											
10	7,5	---	8,6	---	14,1	57.912	58.3445	58.3546	58.3548	58.0283	57.1275	55.6334	53.7504	51.4431	49.1631	46.6237	44.3001

Technical Sheet



DIMENSIONS (mm)				
DN	D	K	n°	Ø
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18

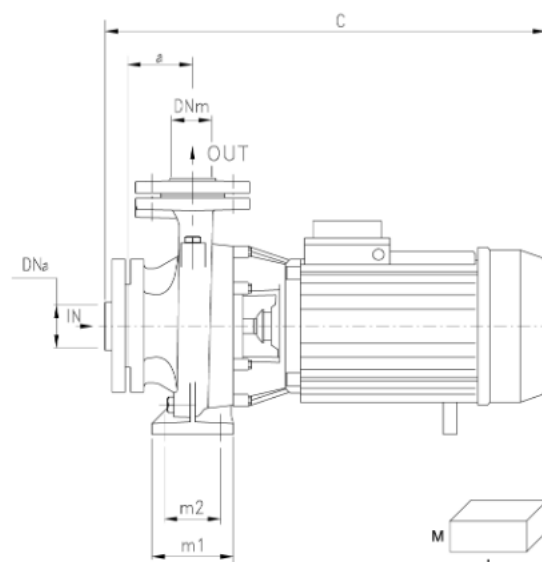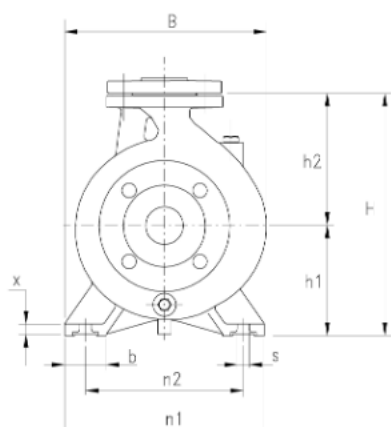

DNA	DNM	DIMENSIONS (mm)																Kg
		a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H	I	L	M	
50	32	80	160	180	100	70	240	190	50	12	14	565	268	340	627	287	408	79

Notes

The information may be subject to change without notice. It is always advisable to contact our commercial department in order to get further information about the products, their technical specifications and warranty conditions. The Company is expressly relieved of any liability for the purchasing of a product not in line with the customer's needs, if not consulted beforehand for a specific consultancy.



Working Curves

Pump type: CM32-200A


Curv n°:

CM32-200A

Date:

6/22/2022

Q (m³/h) 25 | H (m) 50 | Power [kW] 6.85 | Efficiency % 50.12 | NPSH (m) 3.85

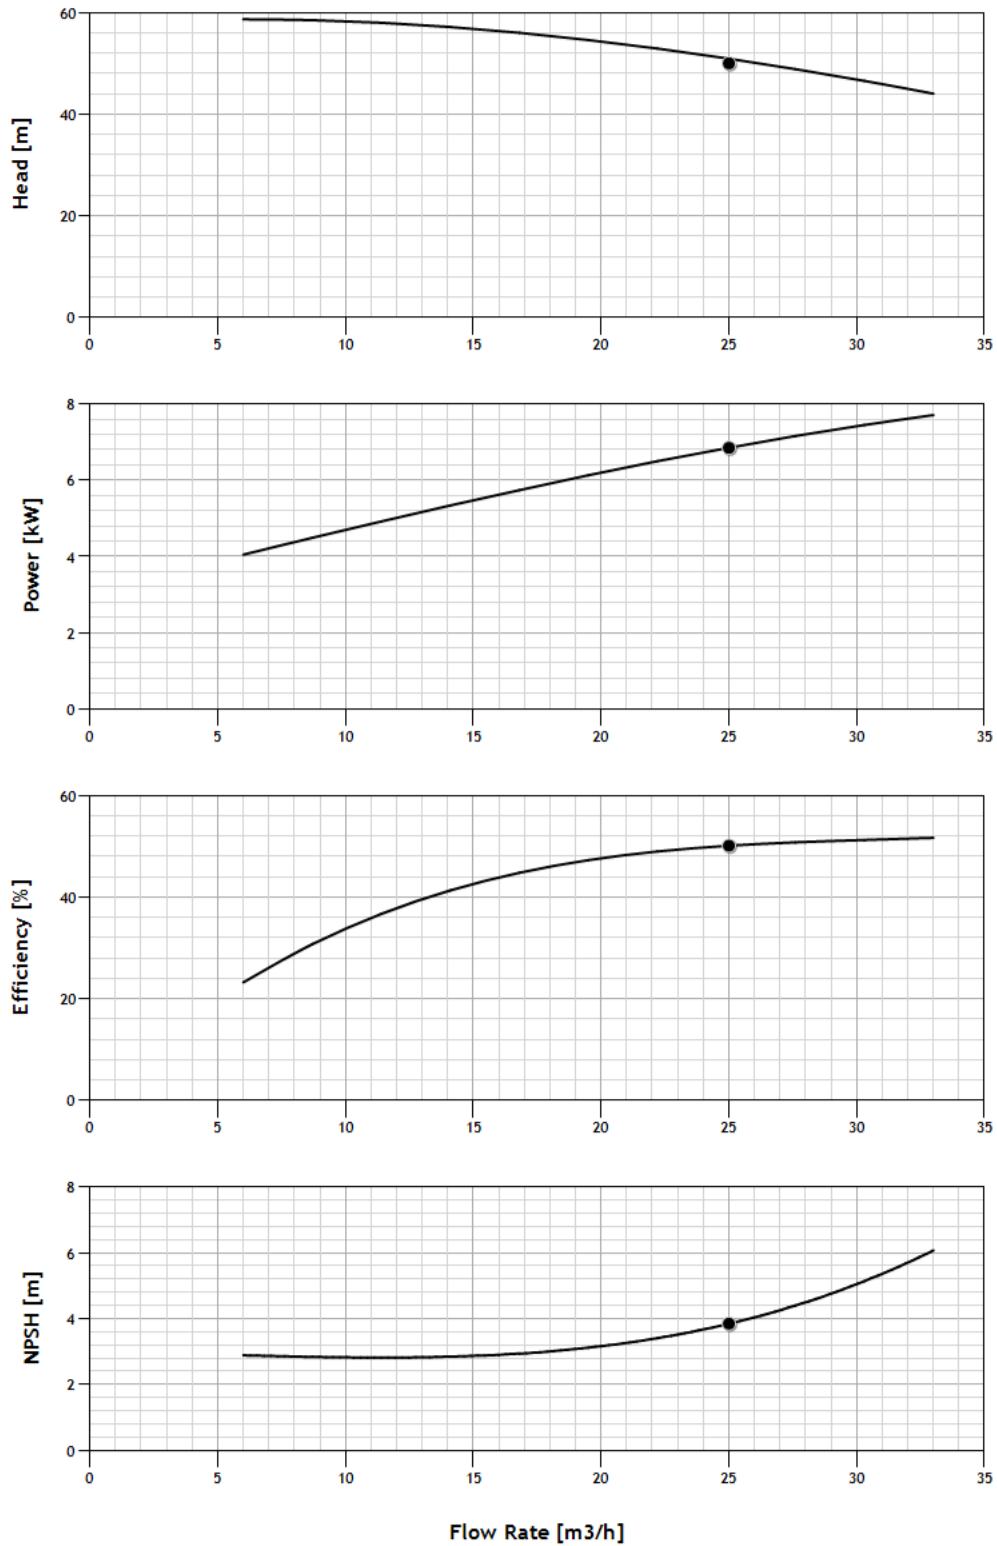

MEI $\geq$ 0.4 (regulation EU N. 547/2012)
Tolerances according to UNI ISO 9906 grade 3B