


Company name: NTD Pumps And Mechanical Construction Co.,LTD

Created by: Tien Nguyen Van Phone: 0949570529

Email: tien.nv@ntdpumps.com

Date: 20/05/2022

Description	Value
General information:	
Product name:	NB 50-200/219 AAF2AESBAQEJW3
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	1440 rpm
Rated flow:	44.69 m³/h
Rated head:	13.91 m
Actual impeller diameter:	219 mm
Nominal impeller diameter:	200
Shaft seal arrangement:	Single
Shaft diameter:	24 mm
Code for shaft seal:	BAQE
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A
Bearing design:	Standard
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Wear ring:	Brass
Impeller:	Cast iron
Impeller:	EN-GJL-200
Impeller:	ASTM class 30
Internal pump house coating:	CED
Material code:	A
Code for rubber:	F
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
Installation:	AISI 304
	60 %
t max amb:	60 °C 16 bar
Maximum operating pressure:	
Pipe connection standard:	EN 1092-2
Size of inlet connection:	DN 65
Size of outlet connection:	DN 50
Pressure rating for connection:	PN 16
Bearing lubrication:	Grease
Pump housing with feet:	Yes
Support block (Yes/No):	N
Connect code:	F2
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	100LB
IE Efficiency class:	IE3
Rated power - P2:	3 kW
	50 Hz
Mains frequency:	3 x 220-240D/380-420Y \
Rated voltage:	
	11,0-10,2/6,40-5,80 A
Rated voltage:	11,0-10,2/6,40-5,80 A 700-700 %
Rated voltage: Rated current: Starting current:	
Rated voltage: Rated current: Starting current: Cos phi - power factor:	700-700 % 0.8
Rated voltage: Rated current: Starting current:	700-700 %

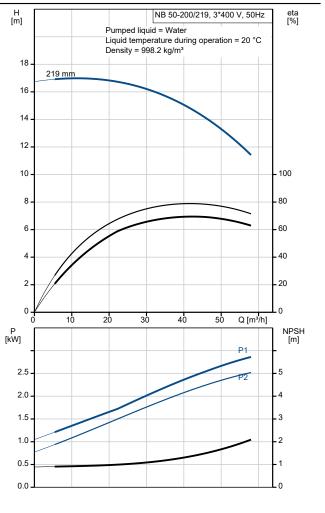



Company name: NTD Pumps And Mechanical Construction Co.,LTD Tien Nguyen Van

Tien Nguyen Van 0949570529 Phone:

tien.nv@ntdpumps.com 20/05/2022 Email:

Date:

Description	Value
Motor efficiency at 3/4 load:	88.2-88.2 %
Motor efficiency at 1/2 load:	87.1-87.1 %
Number of poles:	4
Enclosure class (IEC 34-5):	55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Built-in motor protection:	PTC
Motor No:	83L06210
Mount. design. acc. IEC 34-7:	IM V1/B5
Bearing insulation type N-end:	STEEL BEARING
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.70
Net weight:	86 kg
Gross weight:	103 kg
Shipping volume:	0.315 m³