


Company name: NTD Pumps And Mechanical Construction Co.,LTD

Created by: Tien Nguyen Van Phone: 0949570529

Email: tien.nv@ntdpumps.com

Date: 20/05/2022

Description	Value
General information:	Taluo
Product name:	NB 50-250/263 AAF2BESBQQESW1
Product No:	On request
AN number:	On request
echnical:	<u> </u>
ump speed on which pump data are ased:	2955 rpm
Rated flow:	96.9 m³/h
Rated head:	79.74 m
actual impeller diameter:	263 mm
Nominal impeller diameter:	250
Shaft seal arrangement:	Single
Shaft diameter:	24 mm
Code for shaft seal:	BQQE
Curve tolerance:	ISO9906:2012 3B
Pump version:	Α
Bearing design:	Standard
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Vear ring:	Brass
mpeller:	Bronze
npeller:	CuSn10-C
nternal pump house coating:	CED CED
laterial code:	В
ode for rubber:	F
haft:	Stainless steel
nait. haft:	EN 1.4301
nait: haft:	AISI 304
naπ: nstallation:	AIOI 304
nstallation: max amb:	40 °C
	16 bar
laximum operating pressure:	
ipe connection standard:	EN 1092-2 DN 65
Size of inlet connection:	
Size of outlet connection:	DN 50
Pressure rating for connection:	PN 16
Bearing lubrication:	Grease
Pump housing with feet:	No
Support block (Yes/No):	N
Connect code:	F2
iquid:	
Pumped liquid:	Water
iquid temperature range:	-25 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
flotor type:	WEG
E Efficiency class:	IE3
Rated power - P2:	37 kW
lains frequency:	50 Hz
ated voltage:	3 x 380-415 V
Rated current:	68.1-63.8 A
Starting current:	840-840 %
raining barront.	0.88/0.86
Cos phi - power factor: Rated speed:	2960/3570 rpm
Cos phi - power factor:	
cos phi - power factor: lated speed:	2960/3570 rpm

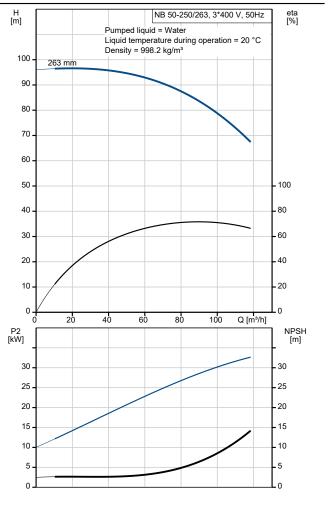



Company name: NTD Pumps And Mechanical Construction Co.,LTD Tien Nguyen Van

Tien Nguyen Van 0949570529 Phone:

tien.nv@ntdpumps.com 20/05/2022 Email:

Date:

Description	Value
Number of poles:	2
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	PTC
Motor No:	99174344
Mount. design. acc. IEC 34-7:	IM B35
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.67
Net weight:	289 kg
Gross weight:	314 kg
Shipping volume:	0.707 m³