


Company name: NTD Pumps And Mechanical Construction Co.,LTD

Created by: Tien Nguyen Van Phone: 0949570529

Email: tien.nv@ntdpumps.com

Date: 20/05/2022

Description	Value
General information:	NDC 50 22 200/040
Product name:	NBG 50-32-200/219 AAF2AESBAQEHW3
Product No:	On request
EAN number:	On request
Technical:	
Pump speed on which pump data are based:	1440 rpm
Rated flow:	19.27 m³/h
Rated head:	12.92 m
Actual impeller diameter:	219 mm
Nominal impeller diameter:	200
Shaft seal arrangement:	Single
Shaft diameter:	24 mm
Code for shaft seal:	BAQE
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A
Bearing design:	Standard
Materials:	
Pump housing:	Cast iron
Pump housing:	EN-GJL-250
Pump housing:	ASTM class 35
Wear ring:	Brass
mpeller:	Cast iron
mpeller:	EN-GJL-200
mpeller:	ASTM class 30
nternal pump house coating:	CED
Material code:	Α
Code for rubber:	E
Shaft:	Stainless steel
Shaft:	EN 1.4301
Shaft:	AISI 304
nstallation:	
max amb:	60 °C
Maximum operating pressure:	16 bar
Pipe connection standard:	EN 1092-2
Size of inlet connection:	DN 50
Size of outlet connection:	DN 32
Pressure rating for connection:	PN 16
Bearing lubrication:	Grease
Pump housing with feet:	Yes
Support block (Yes/No):	N
Connect code:	F2
Liquid:	
Pumped liquid:	Water
iquid temperature range:	0 120 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Motor type:	90LA
E Efficiency class:	IE3
Rated power - P2:	1.5 kW
Mains frequency:	50 Hz
Rated voltage:	3 x 220-240D/380-415Y V
Rated current:	5,85-5,35/3,40-3,09 A
Starting current:	716-700 %
Cos phi - power factor:	0.78
	1440 rpm
Raled speed.	
Rated speed: Efficiency:	IE3 85,3%

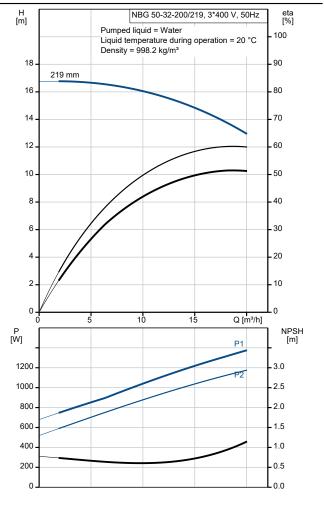



Company name: NTD Pumps And Mechanical Construction Co.,LTD Tien Nguyen Van

Tien Nguyen Van 0949570529 Phone:

tien.nv@ntdpumps.com 20/05/2022 Email:

Date:

Description	Value
Motor efficiency at 3/4 load:	85.5-85.5 %
Motor efficiency at 1/2 load:	83.8-83.8 %
Number of poles:	4
Enclosure class (IEC 34-5):	55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Motor No:	99313167
Mount. design. acc. IEC 34-7:	IM V1/B5
Bearing insulation type N-end:	STEEL BEARING
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.69
Net weight:	50 kg
Gross weight:	59 kg
Shipping volume:	0.178 m³
Sales region:	CN