

Company name: NTD Pumps And Mechanical Construction Co.,LTD Created by: Tien Nguyen Van


Tien Nguyen Van 0949570529

Email: tien.nv@ntdpumps.com

Date: 21/05/2022

Phone:

Description	Value
Seneral information:	NIZO 400 OF 050/070
Product name:	NKG 100-65-250/270 AA1F2AESBAQEMW3
Product No:	On request
AN number:	On request
echnical:	'
re based:	1460 rpm
tated flow:	75.52 m³/h
ump with motor (Yes/No):	Υ
ated head:	22.71 m
ctual impeller diameter:	270 mm
lominal impeller diameter:	250
haft diameter:	32 mm
Code for shaft seal:	BAQE
lechanical seal type:	Single
Curve tolerance:	ISO9906:2012 3B2
Pump version:	A1
earing design:	Standard
aterials:	
ump housing:	Cast iron
Pump housing:	EN-GJL-250
ump housing:	ASTM class 35
Vear ring:	Brass
npeller:	Cast iron
npeller:	EN-GJL-200
npeller:	ASTM class 30
iternal pump house coating:	CED
laterial code:	A
ode for rubber:	E
haft:	Stainless steel
haft:	EN 1.4301
haft:	AISI 304
stallation:	
nax amb:	60 °C
laximum operating pressure:	16 bar
ipe connection standard:	EN 1092-2
ype of inlet connection:	DIN
ype of outlet connection:	DIN
ize of inlet connection:	DN 100
ize of outlet connection:	DN 65
ressure rating for connection:	PN 16
Coupling type:	Flexible w/o spacer
ase frame design:	C-channel
Code for base frame:	21
Grouting (Yes/No):	N
Connect code:	F
iquid:	•
umped liquid:	Water
iquid temperature range:	0 120 °C
elected liquid temperature:	20 °C
ensity:	998.2 kg/m³
ensity. lectrical data:	000.2 Ng/III
lotor type:	132M
	IE3
E Efficiency class:	7.5 kW
Rated power - P2:	7.5 KVV 50 Hz
Mains frequency:	
Rated voltage:	3 x 380-415D/660-690Y V
•	11010600
ted current:	14,8-13,6/8,6 A

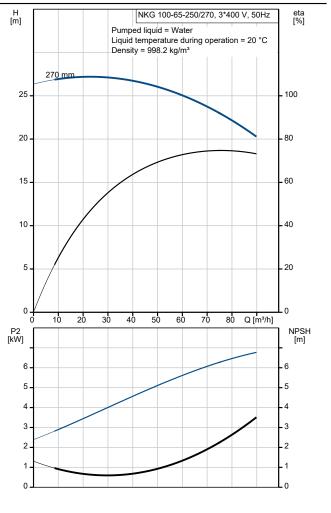



Company name: NTD Pumps And Mechanical Construction Co.,LTD Tien Nguyen Van

Tien Nguyen Van 0949570529 Phone:

tien.nv@ntdpumps.com 21/05/2022 Email:

Date:

Description	Value
Cos phi - power factor:	0.84
Rated speed:	1460 rpm
Efficiency:	IE3 90,5%
Number of poles:	4
Enclosure class (IEC 34-5):	55 (Protect. water jets/dust)
Insulation class (IEC 85):	F
Built-in motor protection:	PTC
Motor No:	83P16122
Bearing insulation type N-end:	STEEL BEARING
Controls:	
Frequency converter:	NONE
Pressure sensor:	N
Others:	
Minimum efficiency index, MEI ≥:	0.67
Net weight:	251 kg
Gross weight:	276 kg
Shipping volume:	0.961 m³